

Technical Datasheet



Performance Series Bourdon Operated Pressure Switch

Models: 231, 232, 233 & 234

Key Features

- Precision stainless steel mechanism for arduous atmospheres and high humidity.
- Set point adjustable over the whole range against calibrated scale with tamperproof adjuster.
- Weatherproof and Flameproof models ATEX and IECEx.
- Safety vented design as standard.
- NACE MR-01-75 compatibility.
- Hermetically sealed microswitch option.
- Models for fixed switching differential, adjustable differential and HI-LO operation.
- Ranges available up to 600 bar (8,500 psi).
Static Pressure up to 690 bar (10,000 psi).



Product applications

The 230 Performance Series is suitable for a wide range of applications in:

- Oil & Gas
- Chemical
- Petrochemical
- Refining
- Power
- Food Industry

The choice of models available ensures that the 230 Performance Series is suitable for use in:

- Corrosive atmospheres
- Resistant to chemical attack

Series Overview

Designed in the mid-1970s and developed over subsequent years, the Performance Series switch range offers users the broadest range of options, the highest levels of set-point repeatability and the confidence of long term performance that a mature product such as this can prove.

The model 231/232/233/234 Performance Series pressure switches utilise bourdon tube type sensor that offer a very linear response to pressure change. This sensor, coupled with a precision stainless steel mechanism designed to minimise friction in the moving parts, helps deliver the market leading performance customers have come to expect from the series.

How can we help you?


Delta Mobrey offers fast, efficient and knowledgeable support when and where you need it. Please visit our website at www.delta-mobrey.com to find your local support centre or call us on:

+44 (0) 1252 729140

Performance Series
Models: 231, 232, 233 & 234

How to order

Switches can be configured by selecting codes representing the desired features from the tables that follow. The chart below, describes how the model code is built up. For assistance in configuring a switch that best suits your needs, please contact your local sales office.

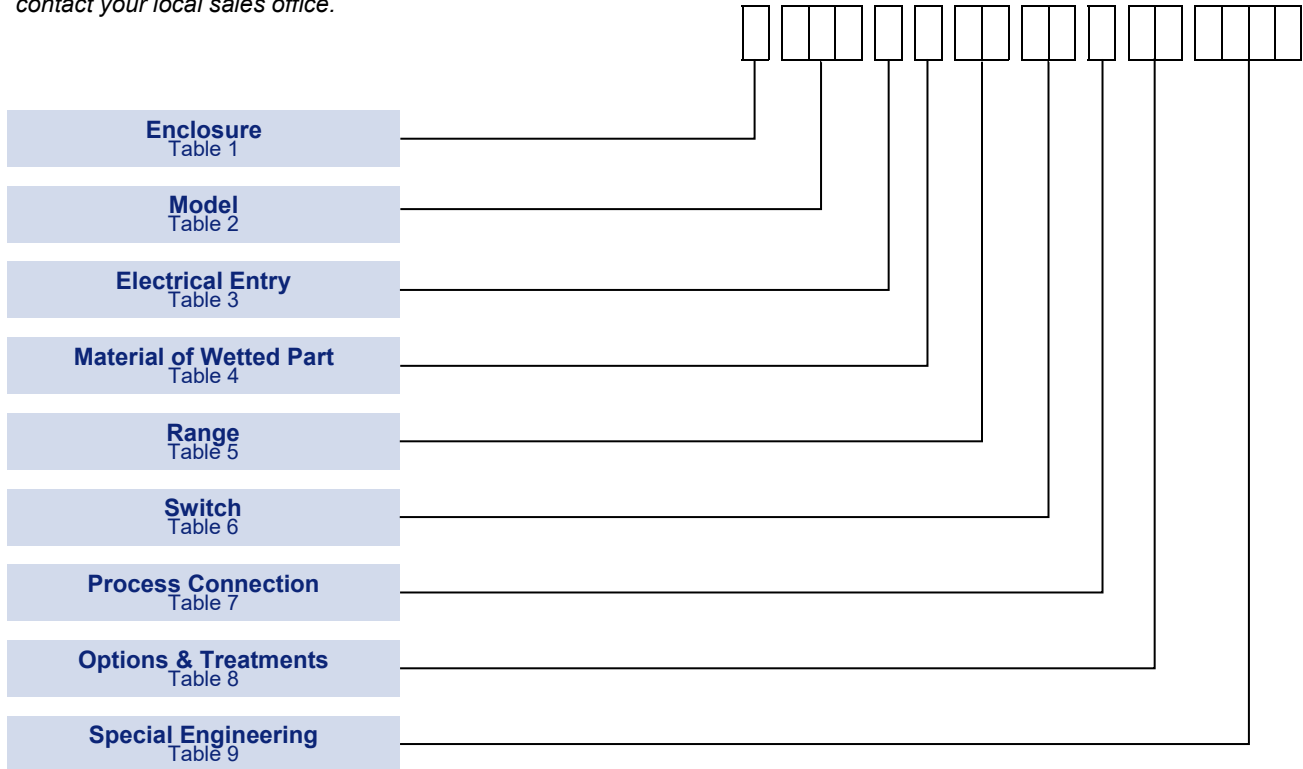

NOTE: Options shaded in the following tables are the most common options and are available on the quickest lead-times and at the lowest cost.

NOTE: Only the most common options are shown in this data sheet. Should you require a feature that is not shown, please contact your local sales office for further details.

Technical Specification

Performance Series
Models: 231, 232, 233 & 234

| | |
|-------------------------------------|---|
| Accuracy: | Set point repeatability $\pm 1\%$ of span at 20°C / 68°F ambient. Scale accuracy $\pm 3\%$ of full scale. |
| Storage Temperature: | -25 to +60°C / -13 to +140°F |
| Ambient Temperature: | -25 to +60°C / -13 to +140°F Special build is also available for temperatures down to -60°C (-76°F) |
| Maximum Process Temperature: | Subject to appropriate installation practice, the component parts will withstand up to +120°C (+248°F). For higher temperatures refer to SPECIAL ENGINEERING. |
| Enclosure classification: | IP66 / NEMA 4X / Flameproof Ex d |
| Switch output: | SPDT or DPDT snap action microswitch (standard) Hermetically sealed (optional) |
| Electrical rating: | See Table 6 |
| Process Connection: | Rc 1/4 (BSP), 1/4 NPT Internal, 1/2 NPT Internal & 1/2 NPT External |
| Approximate Weight: | Enclosures: “W & N” 3.1kg/6.8lb; “A & O” 3.9kg/8.6lb; “H” 4.6kg/10.2lb; “K” 9.4kg/20.7lb. |

Enclosure

FINISH

All enclosures except Type A are finished in light grey epoxy resin paint. Special finishes to order.

INTRINSIC SAFETY

Because of the low voltages and currency of I.S. circuits, we recommend using gold and/or sealed contacts.

Temperatures in Table 1 refer to limitations for certified enclosures.

See **TECHNICAL SPECIFICATION**

| | |
|---------|--|
| TABLE 1 | |
|---------|--|

| ENCLOSURE TYPES | Code |
|---|------|
| Weatherproof Enclosures | |
| General Purpose The basic enclosure is pressure die-cast in zinc alloy, offering weather protection not less than NEMA 4 + 13/IP66. | W |
| For Aggressive Atmospheres Investment cast enclosure in austenitic stainless steel with weather protection not less than NEMA 4X + 13/IP66. | A |
| Flameproof Enclosures Category 2 (Zone 1) | |
| ATEX Ex db IIC T6 (-60 to +40°C), T4 (-60 to +80°C) II 2 G D Gravity die-cast enclosure in aluminium-silicon alloy. Suitable for outdoor use, IP66 / NEMA 4. II 2 G D | H |
| IECEX Ex db IIC | |
| ATEX Ex db IIC T6 (-60 to +40°C), T4 (-60 to +80°C) II 2 G D As Code H, but sand cast in high quality grey iron. II 2 G D | K |
| IECEX Ex db IIC | |
| Exn Enclosures Category 3 (Zone 2). | |
| Type of Protection Exn II T6 (-25 to +40°C), T4 (-25 TO +80°C) II 3 G D As code 'W' but Exn. Weatherproof to NEMA 4/IP66. Limited switching facility (see Table 6). II 3 G D | N |
| As 'N' but with investment cast enclosure in austenitic stainless steel as 'A'. | O |

Models

| | |
|---------|--|
| TABLE 2 | |
|---------|--|

| | Code |
|--|------|
| Fixed Switching Differential See Tables 10A & 10D. Basic model giving close, fixed switching differential using proprietary microswitch operated by high integrity stainless steel mechanism. Set point field adjustable over full range against calibrated scale. SPDT & DPDT options available. | 231 |
| Adjustable Switching Differential (Limited Span) See Tables 10B & 10E. Achieved by special microswitch with built in adjuster, SPDT only. Not available with enclosure code N or O. | 232 |
| Adjustable Switching Differential (Wide Span) See Tables 10B & 10E. Separate control of set and reset points with individual setting points on calibrated scale. | 233 |
| HI-LO Switching (Adjustable Gap) See Tables 10C & 10F. Two individual set points and separate electrical circuits, with independent adjustment against calibrated scale. | 234 |

Performance Series
Models: 231, 232, 233 & 234

Electrical Entry


Adaptors are available for other popular thread sizes.

Enclosures 'W' and 'N'

Standard option code 1(22mm dia) is provided with a nylon 22/20 reducer and fibre washer suitable for a standard M20 cable gland and back nut. Option code 0 elbow adaptor is factory fitted. Adaptor kits may also be provided retrospectively to fit at site if required. Ask for details. See diagrams for dimensions.

'W' and 'N' SAFETY NOTE


If a metal cable gland is site fitted it must either be earthed locally or an earth/gland plate must be used to connect the body of the gland at the enclosure earthing point. Earth/gland plates can be provided either factory fitted or in kit form for site assembly. Ask for details.

TABLE 3 

| | Code |
|--|------|
| Enclosures W & N: Clearance for 20mm (3/4 in) outside dia conduit. | 1 |
| Enclosures H, K, A & O: M20 x 1.5 ISO thread (direct) | 0 |
| Enclosures H & K: M20 x 1.5 ISO thread, dual entry. | 5 |
| Enclosures H & K: 3/4-NPT INT. | 3 |
| Enclosures H & K: 3/4-NPT INT dual entry. | 6 |
| Enclosure W: M20 x 1.5 elbow adaptor. | 0 |
| Enclosure N: M20 x 1.5 straight adaptor (Approved). | 0 |
| Enclosures H & K: 1/2-NPT INT. | 2 |

Material of Wetted Parts

Not all ranges are available with all materials. Refer to Table 5 for availability.

TABLE 4 


| | Code |
|--|------|
| Bourdon tube and process connection of 316 stainless steel welded fabrication . | 2 |
| Nickel alloy (Monel) bourdon tube and connection*. For wetted parts required to conform with Sour Gas and Sour Crude applications as laid down in NACE standard MR-01-75*. | M |

Setting Ranges

P_{max} = maximum working pressure

NOTE: Range codes shown are for bar/psi units only. Code will differ for other units.

For ranges and models requiring Monel wetted parts not shown in Table 5, ask for details.


TABLE 5 

| Range | | | | | |
|---------------|-----------------------|-------|-------|-------|----------|
| | | 231 | | 232 | |
| | | | | 233 | |
| | | | | 234 | |
| P_{max} | Range bar/ PSI | ST ST | Monel | ST ST | Code |
| 125 1800 | 0 to 100 0 to 1500 | ✓ | - | ✓ | U0 UB |
| 184 2670 | 0 to 160 0 to 2000 | ✓ | - | ✓ | U5 UF |
| 287 4160 | 0 to 250 0 to 3500 | ✓ | - | ✓ | V5 V2 |
| 460 6670 | 0 to 400 0 to 5800 | ✓ | ✓ | ✓ | W6 W2 |
| 690 10,000 | 0 to 600 0 to 8500 | ✓ | ✓ | ✓ | Y3 YB |

Performance Series
Models: 231, 232, 233 & 234

Switching Options

TABLE 6



A much wider variety of switching options can be engineered to customers' special requirements for models 231 and 234 pressure switches, including heavy DC, manual latching, pneumatic output etc. On models 232 and 233, only the switching options specified can be supplied. Please consult our engineers for further information.

| Model 231 | | | | | | | | | |
|---|--|--|-------|-----------|-----------|----------|----------------|---------------------------------------|--|
| CSA RATING (RESISTIVE) § see note | IEC947-5-1 / EN 60947-5-1 RATING | | | | | | Contact | Code | |
| | Designation & Utilisation Category | Rated operational current I_e (A) at rated operational voltage U_e | U_i | U_{imp} | VA Rating | | | | |
| | | | | | Make | Break | | | |
| 5 Amps @ 110/250V AC Light Duty for AC only | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 28 | 72 28 | SPDT DPDT | 00 01 | |
| 5 Amps @ 110/250V AC & 2 Amps @ 30V DC General purpose precision | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 28 | 72 28 | SPDT DPDT | 02 03 | |
| 1 Amp @ 125V AC & § 100mA @ 30V DC Gold Alloy contacts for low voltage switching | 1A @ 125 VAC RESISTIVE (IEC 1058-1 / EN 61058-1) | | | | | | SPDT DPDT | 04 05 | |
| § 5 Amps @ 110/250V AC & 5 Amps @ 30V DC Environmentally sealed | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.5kV | 432 28 | 72 28 | SPDT* DPDT* | 08 09 | |
| § 1 Amp @ 30V AC & 30V DC Environmentally sealed with gold contacts | AC14 E150 | 0.3A @ 120 V AC | 125V | 0.5kV | 216 | 36 | SPDT* DPDT* | 0G 0H | |
| 5 Amps @ 250V AC & 2 Amps @ 30V DC Hermetically sealed. Gold plated silver contacts | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.5kV | 432 28 | 72 28 | SPDT DPDT | H2 H3 [†] H6 [‡] | |
| † 2 Single pole, double throw, simultaneous falling under pressure ‡ 2 Single pole, double throw, simultaneous rising under pressure | | | | | | | | | |
| Model 232 (Cannot be supplied with enclosure Code N/O) | | | | | | | | | |
| 5 Amps @ 110/250V AC Light Duty for AC only Adjustable | AC14 D300 | 0.6/0.3A @ 120/240 V AC | 250V | 0.8kV | 432 | 72 | SPDT | 0C | |
| 5 Amps @ 110/250V AC & 2 Amps @ 30 V DC Adjustable | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 28 | 72 28 | SPDT | 0D | |
| Model 233 | | | | | | | | | |
| 5 Amps @ 110/250V AC & 2 Amps @ 30V DC General purpose precision | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 | 72 | SPDT | 02 | |
| Model 234 | | | | | | | | | |
| 5 Amps @ 110/250V AC Light Duty for AC only | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 28 | 72 28 | SPDT | 20 | |
| 5 Amps @ 110/250V AC & 2 Amps @ 30V DC General purpose precision | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.8kV | 432 28 | 72 28 | SPDT | 22 | |
| 1 Amp @ 125V AC & § 100mA @ 30V DC Gold Alloy contacts for low voltage switching | 1A @ 125 VAC RESISTIVE (IEC 1058-1/EN 61058-1) | | | | | | SPDT | 24 | |
| § 5 Amps @ 110/250V AC & 5 Amps @ 30V DC Environmentally sealed | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.5kV | 432 28 | 72 28 | SPDT* | 28 | |
| § 1 Amp @ 30V AC & 30V DC Environmentally sealed with gold contacts | AC14 E150 | 0.3A @ 120 V AC | 125V | 0.5kV | 216 | 36 | SPDT* | 2G | |
| 5 Amps @ 250V AC & 2 Amps @ 30V DC Hermetically sealed. Gold plated silver contacts | AC14 D300 DC13 R300 | 0.6/0.3A @ 120/240 V AC 0.22/0.1A @ 125/250V DC | 250V | 0.5kV | 432 28 | 72 28 | SPDT | H4 | |

The electrical rating is dependent on the microswitch fitted to the instrument. The electrical ratings defined by each approval that the microswitch complies with and is shown on the product nameplate, ie CSA, or IEC. It should be noted that the instrument must be used within the electrical rating specified from the approval you require. This table lists the actual IEC ratings against the Designation & Utilisation Category marked on the nameplates. In the absence of any verification by CSA the microswitch § manufacturer's rating is stated in **italics and bold**. **If in doubt seek guidance from the factory.**

NOTE: For low energy circuits e.g. 30V and up to 100mA, we recommend using gold alloy contact switches.
 U_i = rated insulation voltage U_{imp} = rated impulse to withstand voltage across contacts.


*Suitable for use with Exn Enclosures (See Table 1)

Process Connection

Other thread specifications and sizes are available without using adaptors.

See DIMENSIONS.


Adaptors are available for applications where their use is permitted.

TABLE 7 

| | Code |
|------------------------------------|------|
| Rc 1/4 (1/4 BSP tr INT) to ISO 7/1 | A |
| 1/4—18 NPT INTERNAL | F |
| 1/2—14 NPT INTERNAL | H |
| 1/2—14 NPT EXTERNAL | J |

Options & Treatments


Combinations available, apply for details.

TABLE 8 

| | Code |
|---|-------------------|
| Tropicalisation High humidity atmospheres | 01 |
| Marine and Offshore Saline atmosphere or salt spray | 02 |
| Ammonia Process (wetted) parts and construction suitable for atmospheric ammonia | 03 |
| Oxygen Service 2: Process (wetted) parts are cleaned for oxygen | 04 |
| Oxygen Service 3: Process and non-process parts are cleaned for use with oxygen | 05 |
| Stainless Steel Pipe Mounting Bracket Permits local 2" pipe work to be utilized for mounting the instrument | 10 |
| Tagging - Variety of tagging methods are available | APPLY FOR DETAILS |
| Applies when - no option is required and selection is made from special engineering | 00 |

Special Engineering

Last 4 digits of model code only used when special engineering is required.

TABLE 9 

| | Code |
|---|------|
| Please consult Delta sales engineering for special requirements | TBA |

Performance Data

TABLE 10

Bar Units

TABLE 10A
MODEL 231
FIXED SWITCHING DIFFERENTIAL

MODEL 231

TABLE 10A

| Code | Range | SPDT Options | | | | | DPDT Options | | | | |
|------|----------|--------------|-----|-----|---------|-----|--------------|-----|-----|---------|---------|
| | | 00 | 02 | 04 | 08 / 0G | H2 | 01 | 03 | 05 | 09 / 0H | H3 / H6 |
| U0 | 0 to 100 | 1.2 | 2.5 | 1.2 | 2 | 3.6 | 2.4 | 2.4 | 2.4 | 3 | 3.6 |
| U5 | 0 to 160 | 2 | 6 | 2 | 4 | 6 | 4 | 6 | 4 | 6 | 8 |
| V5 | 0 to 250 | 3 | 9 | 3 | 10 | 9 | 6 | 12 | 6 | 15 | 12 |
| W6 | 0 to 400 | 8 | 24 | 8 | 20 | 24 | 16 | 24 | 16 | 30 | 32 |
| Y3 | 0 to 600 | 12 | 36 | 12 | 60 | 36 | 24 | 30 | 24 | 90 | 50 |

TABLE 10B
MODELS 232, 233
ADJUSTABLE SWITCHING DIFFERENTIAL

MODELS 232, 233

TABLE 10B

| Code | Adjustable Range | MODEL 232 | | | | MODEL 233 | |
|------|------------------|-----------|----|------|-----|--------------|-----|
| | | SPDT Only | | | | SPDT Options | |
| | | 0C | | 0D | | 02 | |
| | | From | To | From | To | From | To |
| U0 | 0 to 100 | 2 | 5 | 4 | 12 | 18 | 100 |
| U5 | 0 to 160 | 3.2 | 8 | 6.4 | 19 | 35 | 160 |
| V5 | 0 to 250 | 6 | 15 | 12 | 36 | 54 | 250 |
| W6 | 0 to 400 | 12 | 30 | 24 | 72 | 100 | 400 |
| Y3 | 0 to 600 | 18 | 45 | 36 | 108 | 150 | 600 |

Due to manufacturing tolerances the figures quoted in these tables are for guidance only and are typical for weatherproof models. Should the differential be critical for specific applications, our engineers should be consulted prior to ordering.

MODEL 234

TABLE 10C

| Code | Range | Diff | 20 | | Diff | 22 | | Diff | 24 | | Diff | 28/2G | | Diff | H4 | |
|------|----------|------|-----|-----|------|-----|-----|------|-----|-----|------|-------|-----|------|-----|-----|
| | | | Gap | | | Gap | | | Gap | | | Gap | | | | |
| | | | Min | Max | | Min | Max | | Min | Max | | Min | Max | | Min | Max |
| U0 | 0 to 100 | 1.2 | 11 | 100 | 3.6 | 13 | 100 | 1.2 | 11 | 100 | 6 | 16 | 100 | 6 | 16 | 100 |
| U5 | 0 to 160 | 2 | 25 | 160 | 8 | 28 | 160 | 2 | 25 | 160 | 10 | 33 | 160 | 10 | 33 | 160 |
| V5 | 0 to 250 | 3 | 38 | 250 | 10.5 | 44 | 250 | 3 | 38 | 250 | 15 | 53 | 250 | 15 | 53 | 250 |
| W6 | 0 to 400 | 8 | 80 | 400 | 24 | 96 | 400 | 8 | 80 | 400 | 40 | 120 | 400 | 40 | 120 | 400 |
| Y3 | 0 to 600 | 12 | 100 | 600 | 36 | 124 | 600 | 12 | 100 | 600 | 60 | 160 | 600 | 60 | 160 | 600 |

PSI Units

TABLE 10D
MODEL 231
FIXED SWITCHING DIFFERENTIAL

MODEL 231

TABLE 10D

| Code | Range | SPDT Options | | | | | DPDT Options | | | | |
|------|-----------|--------------|-----|-----|---------|-----|--------------|-----|-----|---------|---------|
| | | 00 | 02 | 04 | 08 / 0G | H2 | 01 | 03 | 05 | 09 / 0H | H3 / H6 |
| UB | 0 to 1500 | 18 | 36 | 18 | 29 | 52 | 35 | 35 | 35 | 44 | 52 |
| UF | 0 to 2000 | 29 | 87 | 29 | 58 | 87 | 58 | 87 | 58 | 87 | 116 |
| V2 | 0 to 3500 | 44 | 131 | 44 | 145 | 130 | 87 | 174 | 87 | 218 | 174 |
| W2 | 0 to 6000 | 116 | 348 | 116 | 290 | 348 | 232 | 348 | 232 | 435 | 464 |
| YB | 0 to 8500 | 174 | 522 | 174 | 870 | 508 | 348 | 435 | 348 | 1305 | 725 |

TABLE 10E
MODELS 232, 233
ADJUSTABLE SWITCHING DIFFERENTIAL

MODELS 232, 233

TABLE 10E

| Code | Adjustable Range | MODEL 232 | | | | MODEL 233 | |
|------|------------------|-----------|-----|------|------|--------------|------|
| | | SPDT Only | | | | SPDT Options | |
| | | 0C | | 0D | | 02 | |
| | | From | To | From | To | From | To |
| UB | 0 to 1500 | 29 | 73 | 58 | 174 | 261 | 1500 |
| UF | 0 to 2000 | 47 | 116 | 93 | 276 | 500 | 2000 |
| V2 | 0 to 3500 | 87 | 218 | 174 | 522 | 780 | 3500 |
| W2 | 0 to 6000 | 174 | 435 | 328 | 1044 | 1450 | 6000 |
| YB | 0 to 8500 | 261 | 653 | 522 | 1566 | 2176 | 8500 |

Flameproof models may be up to 2 times higher depending on the range. Should the differential be critical for specific applications our engineers should be consulted prior to ordering.

MODEL 234

TABLE 10F

| Code | Range | Diff | 20 | | Diff | 22 | | Diff | 24 | | Diff | 28/2G | | Diff | H4 | |
|------|-----------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|------|
| | | | Gap | | | Gap | | | Gap | | | Gap | | | | |
| | | | Min | Max | | Min | Max | | Min | Max | | Min | Max | | Min | Max |
| UB | 0 to 1500 | 18 | 160 | 1500 | 52 | 189 | 1500 | 18 | 160 | 1500 | 87 | 232 | 1500 | 87 | 232 | 1500 |
| UF | 0 to 2000 | 29 | 363 | 2000 | 116 | 406 | 2000 | 29 | 363 | 2000 | 145 | 480 | 2000 | 145 | 480 | 2000 |
| V2 | 0 to 3500 | 44 | 551 | 3500 | 152 | 638 | 3500 | 44 | 551 | 3500 | 174 | 522 | 3500 | 174 | 522 | 3500 |
| W2 | 0 to 6000 | 116 | 1160 | 6000 | 348 | 1393 | 6000 | 116 | 1160 | 6000 | 1740 | 1740 | 6000 | 1740 | 1740 | 6000 |
| YB | 0 to 8500 | 174 | 1450 | 8500 | 522 | 1798 | 8500 | 174 | 1450 | 8500 | 2320 | 2320 | 8500 | 2320 | 2320 | 8500 |

Performance Series
Models: 231, 232, 233 & 234

Electrical Connections

Terminal Block

Cable entry is to a non-pinching terminal block made of a non-hygroscopic thermosetting plastic, suitable for cables up to 2.5mm²/14AWG.

Earthing/Grounding

An earthing stud is provided inside all weatherproof enclosures, adjacent to the entry. External earthing is standard on flameproof versions. Safety note see Table 3.

Dielectric Strength

The electrical assembly is capable of withstanding *2kV between live parts and earth/ground and 500V between open contacts.

* 1.2kV for micro switch Codes H2, H3, H4 and H6. Refer to Table 6.

Electrical Entry

Standard options are listed in Table 3. Other threads can be accommodated by adaptors. Dual entry available, see Table 3.

Optional Extras

Chemical Seals

Chemical seals of our own or proprietary manufacture can be fitted when required.

Mounting Position/Location/Installation

Vertical as shown, IN DIMENSIONS, taking care to avoid siting in locations that transmit excessive shock or vibration. For further advice contact our engineers.

Pollution degree (EN60947-5-1)

All products are suitable for use in pollution degree 3. For extreme conditions where condensation may readily form, then sealed contacts should be used. See Table 6 Codes 08/09/28, 0G/0H/2G, H2/H3/H4/H6.

Electrical Isolation

These products are not suitable for electrical isolation. Always isolate circuit separately to carry out any electrical work.

Approvals

EUROPEAN DIRECTIVES



Low voltage Directive (LVD) 2014/35/EU.
Compliant to LVD

Pressure Equipment Directive (PED) 97/23/EC:

This product has a process connection size <=DN25 and is therefore categorised as sound engineering practice under Cat 3.3

ATEX APPROVALS



FLAMEPROOF:

Certificate No. BAS01ATEX2426X
EN 60079-0, EN 60079-1, EN 60079-31

For Zone 1 models (**Enclosure code H/K, see Table 1**)

| | | |
|--|---------|---|
| | II 2 GD | Ex db IIC T4 (Tamb -60°C to +80°C) Gb |
| | | Ex tb IIIC T135°C (Tamb -60°C to +80°C) Db IP66 |
| | II 2 GD | Ex db IIC T6 (Tamb -60°C to +40°C) Gb |
| | | Ex tb IIIC T85°C (Tamb -60°C to +40°C) Db IP66 |

GLOBAL CERTIFICATION








IECEx Certified

Ex db IIC T4 (Tamb -60°C to +80°C) Gb
Ex db IIC T6 (Tamb -60°C to +40°C) Gb

Certificate No. IECEx ITS 04.0006X
IEC 60079-0, EN 60079-1

Dimensions

All dimensions mm (inches)

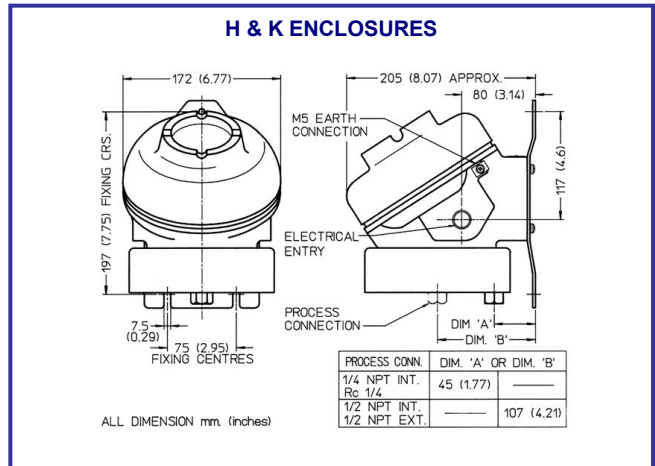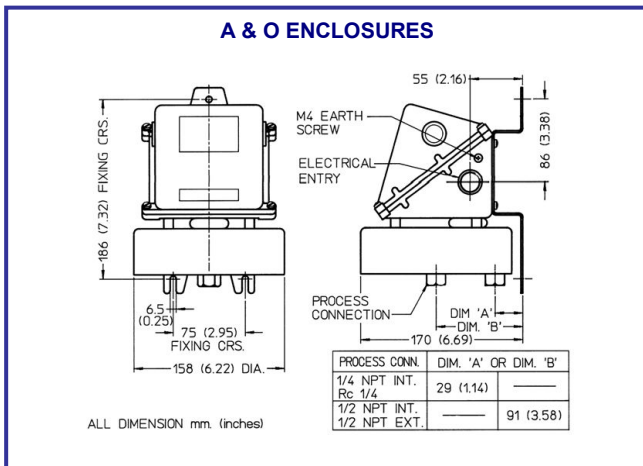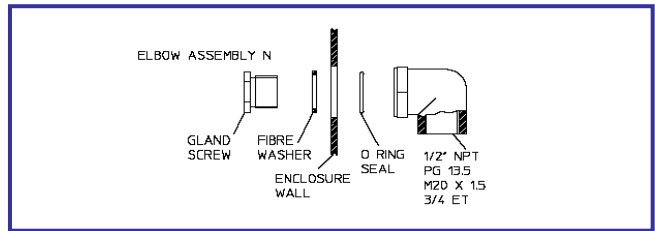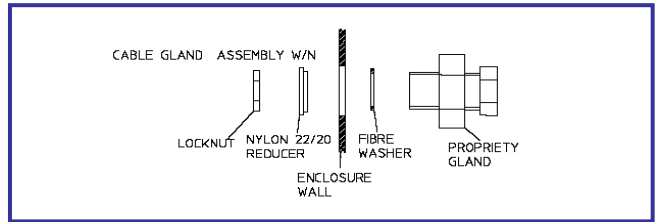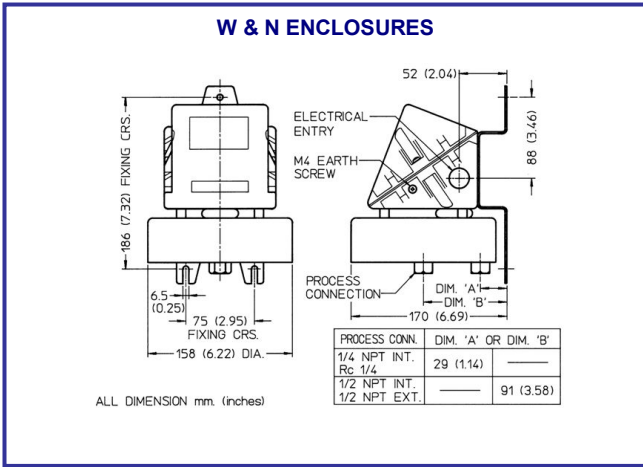

Performance Series
Models: 231, 232, 233 & 234

ISO9001

In the interest of development and improvement Delta Mobrey Ltd, reserves the right to amend, without notice, details contained in this publication. No legal liability will be accepted by Delta Mobrey Ltd for any errors, omissions or amendments.

Delta Mobrey Limited

Hudson House, Albany Park Camberley Surrey, GU16 7PL, UK.

T+44 (0)1252 729140 F+44 (0)1252 729168 E sales@delta-mobrey.com W www.delta-mobrey.com



FM00720