

Technical Datasheet



Sentry Series Differential Pressure Switch

Models: D01, D02 & D03

Key Features

- SPDT & DPDT Switch Outputs
- Stainless Steel, Aluminium Epoxy Coated Flameproof Enclosure IP66/NEMA4X
- ATEX / IECEx Flameproof & Intrinsically Safe
- 316 Stainless Steel Wetted Parts as Standard.
- Field Adjustable Set-points Against a Reference Scale
- Pressure Ranges up to 10bar (160psi)
- Maximum Working Pressure up to 250bar (3500psi)
- Safety Vented Design as Standard
- Suitable for use SIL 2 safety related systems
- **Market Leading 5 year warranty**


Series Overview

The Sentry Series offers exceptional performance and high build quality in a simple, safe and cost-effective package.

- Performance is assured by repackaging Delta's well proven sensor technologies in a new, simple, one-piece enclosure.
- Safety is maintained by a vent that prevents the enclosure becoming pressurized in the event of a sensor being damaged.
- Cost is minimised through the selection of common standard options although, as with all Delta products, a variety of optional extras are available to tailor the product to specific needs.

Other products in the series include:

- Pressure Switches: Model P0
- Temperature Switches: Model T0

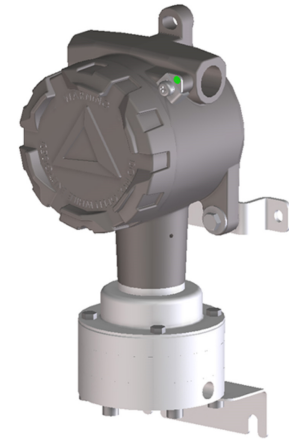

Product applications

The Sentry Series is suitable for a wide range of applications in:

- Process plants
- OEM equipment

The choice of models available ensures that the Sentry Series is suitable for use in:

- General purpose
- Zone 0 & 20 Hazardous Areas
- Zone 1 & 21 Hazardous Areas
- SIL 2 safety related systems
- Corrosive atmospheres

How can we help you?


Delta Mobrey offers fast, efficient and knowledgeable support when and where you need it. Please visit our web site at www.delta-mobrey.com to find your local support centre or call us on:

+44 (0)1252 729140

Sentry Series
Models: D01, D02 & D03

How to order

Switches can be configured by selecting codes representing the desired features from the tables that follow. The chart below, describes how the model code is built up. For assistance in configuring a switch that best suits your needs, please contact your local sales office.

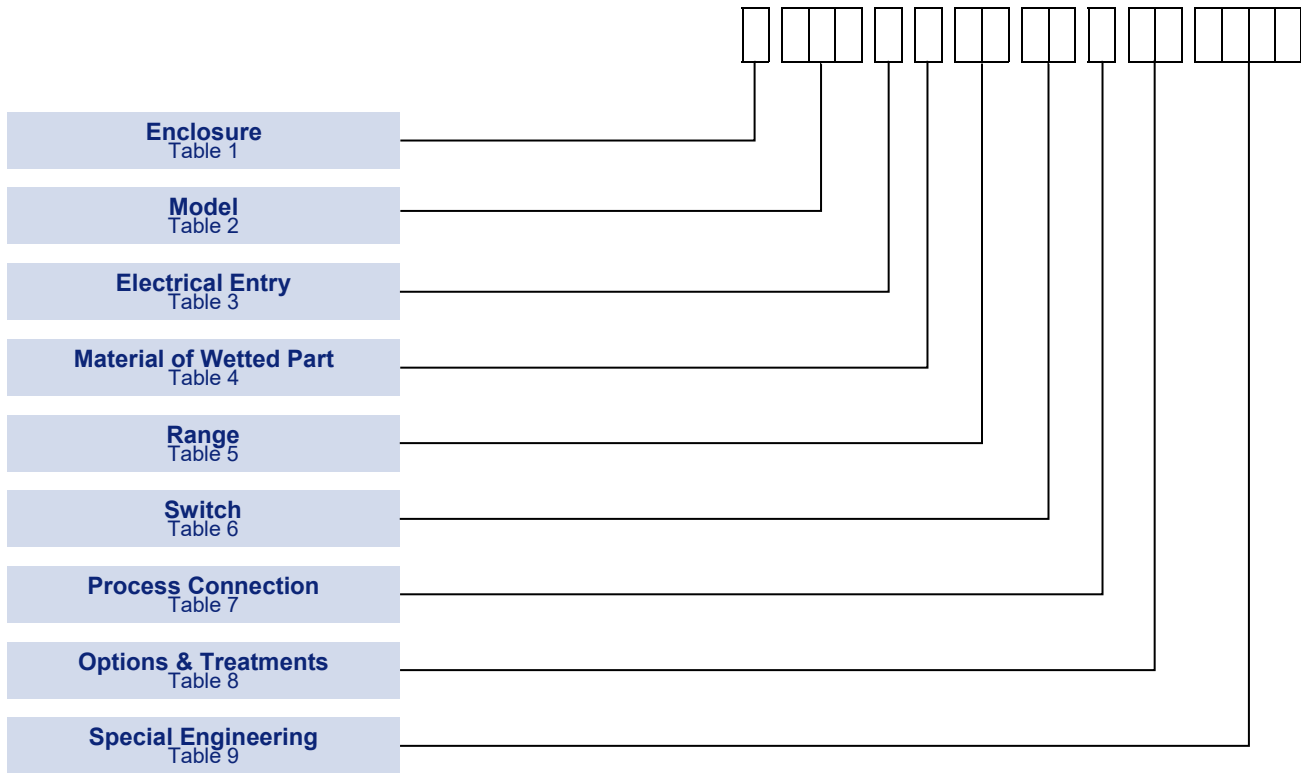

NOTE: Options shaded in the following tables are the most common options and are available on the quickest lead-times and at the lowest cost.

NOTE: Only the most common options are shown in this data sheet. Should you require a feature that is not shown, please contact your local sales office for further details.

Technical Specification



Sentry Series Models: D01, D02 & D03	Accuracy:	Set point repeatability ± 1% of span at 20°C / 68°F
	Storage Temperature:	-40 to +60°C / -40 to +140°F
	Ambient Temperature:	-30 to +60°C / -22 to +140°F
	Maximum Process Temperature:	Subject to appropriate installation practice, the component parts with stand up to +60°C (+140°F).
	Enclosure classification:	IP66 / NEMA 4X / Flameproof Ex d
	Switch output:	SPDT or DPDT snap action microswitch (standard) Hermetically sealed (optional)
	Electrical rating:	See Table 6
	Process Connection:	Rc ¼ (¼ BSP Tr INT) to ISO 7/1 (standard) ¼ -18NPT INT (optional) Others via adapter optional)
	Approximate Weight:	3.2kg / 7lb - 27.8kg / 61.2lb depending on model

Enclosure

All enclosures die-cast in aluminium, epoxy painted, with weather protection not less than NEMA type 4X / IP66

INTRINSIC SAFETY

Because of low voltages and current of I.S. circuit, we recommend using gold and/or sealed contacts

WEATHERPROOF ENCLOSURE		Code
General Purpose The basic enclosure is die-cast in aluminium, epoxy painted, with weather protection not less than NEMA type 4X, IP66.		W
Aggressive Atmospheres Investment cast enclosure in austenitic stainless steel with weather protection not less than NEMA4X, IP66		A
Intrinsic Safety: Ex ia As per General Purpose enclosure above but ATEX and IECEx approved for use in Zone 0 & Zone 20 hazardous locations.  II 1GD Ex ia IIC T5 / T6 Ga Ex ia IIIC T100°C / T85°C Da		5
Intrinsic safety: Ex ia For Aggressive Atmospheres Investment cast enclosure in austenitic stainless steel with weather protection not less than NEMA4X, IP66		4
Flameproof: Ex d ATEX / IECEx approved for use in a Zone 1 & Zone 21 hazardous locations  II 2GD Ex d IIC T6(Tamb-30°C to +65°C) Gb Ex tb IIIC T85°C (Tamb-30°C to +65°C) Db IP6X		H
Flameproof: Ex d For Aggressive Atmospheres Investment cast enclosure in austenitic stainless steel with weather protection not less than NEMA4X, IP66 ATEX / IECEx approved for use in a zone 1 & zone 21 hazardous locations		R


Models

- D01**
For applications between -12.5mbar to 12.5mbar (-5.0 to 5.0 in H2O), maximum working pressure 1 bar (14.5 psi).
- D02**
For applications up to 10 bar (160 psi), maximum working pressure 110 bar (1600 psi).
- D03**
For applications up to 10 bar (160 psi), maximum working pressure 250 bar (3500 psi).

Differential Pressure		Code
Differential Pressure	Diaphragm Operated Low Pressure	D01
Differential Pressure	Diaphragm Operated Standard Pressure	D02
Differential Pressure	Diaphragm Operated High Overload Pressure	D03

Sentry Series
Models: D01, D02 & D03


Switch Options

TABLE 6 

CSA Rating (RESISTIVE) §SEE NOTE	IEC 947-5-1/EN 60947-5-1 RATING							Contact	Code
	Designation & Utilization Category	Rated operational current le (A) at rated operational voltage Ue	U _i	U _{imp}	VA Rating				
						Make	Break		
5 A @ 110/250V AC Light Duty for AC only	AC14 D300	0.6/0.3A @ 120/240V AC	250V	0.8kV	AC	432	72	SPDT	00
	DC13 R300	0.22/0.1A @ 125/250V DC			DC	28	28	DPDT	01
1 A @ 125V AC & §100 mA @ 30V DC gold alloy contacts for low voltage switching	1 A @ 125 VAC RESISTIVE (IEC 1058-1/EN 61058-1)							SPDT	04
								DPDT	05
15 Amp @ 125/250/480 V AC & 2 A @ 30V DC General purpose precision	AC14 D300	0.6/0.3A @ 120/240V AC	250V	0.8kV	AC	432	72	SPDT	10
	DC13 R300	0.22/0.1A @ 125/250V DC	250V	0.8kV	DC	28	28	DPDT	11
5 A @ 250V AC and 2 A @ 30V DC Hermetically sealed. Gold plated silver contacts.	AC14 D300	0.6/0.3A @ 120/240V AC	250V	0.5kV	AC	432	72	SPDT	H2 [†]
	DC13 R300	0.22/0.1A @ 125/250V DC			DC	28	28	DPDT	H3 [†] H6 [‡]


† 2 Single pole, double throw, simultaneous falling under pressure
 ‡ 2 Single pole, double throw, simultaneous rising under pressure
 ^Terminal Block supplied as standard
 Note: For Low energy circuits e.g 30V and up to 100mA, we recommend using gold alloy contact switches
 U_i = rated insulation voltage: U_{imp} = rated impulse to withstand voltage across contacts.
 In the absence of any verification by CSA the microswitch § manufacturer's rating is stated in **italics and bold**.
 If in doubt seek guidance from the factory.

Process Connection

TABLE 7 

	Code
Rc ¼ (¼ BSP Tr INT) to ISO 7/1: Direct	A
¼ NPT F: Direct	F

Options & Treatments


TABLE 8 

Stainless steel nameplate is available as an option

	Code
Stainless steel permanently fixed tags	20
Stainless steel wired on tag	30
Applies when – no option is required and selection is made from special engineering (see Table 9)	00

Sentry Series
Models: D01, D02 & D03

Special Engineering

TABLE 9 

Last 4 digits of model code only used when special engineering is required.

	Code
Please consult Delta sales engineering for special requirements	TBA

Performance Data

TABLE 10

Bar Units

MODELS D01, D02, D03

FIXED SWITCHING DIFFERENTIAL

Due to manufacturing tolerances, the figures quoted in these tables are for guidance only. Should the differential be critical for specific applications, our engineers should be consulted prior to ordering.

Range		P_{max} Bar	Model	Switching Options Switching Differential (mbar)									
Code	mbar / (bar)			00	01	10	11	04	05	08/ OG	09/ OH	H2	H3/ H6
BC	-12.5 to +12.5	1	D01	1.5	1	2	3	1	2	1.8	2.4	3	3
BD	6 to 40	110 250	D02 D03	5	5	5	10	3	6	8	11	15	15
CB	25 to 160	110 250	D02 D03	10	10	16	12	6	7	16	21	22	21
CE	100 to 600	110 250	D02 D03	20	10	22	20	10	10	20	27	35	32
DC	(0.4 to 2.5)	110 250	D02 D03	50	15	120	200	70	100	300	400	400	270
DD	(0.6 to 4)	110 250	D02 D03	200	100	210	270	90	140	360	480	480	480
EA	(1.6 to 10)	110 250	D02 D03	300	180	420	540	180	250	720	960	960	1200

PSI Units

MODELS D01, D02, D03

Range		P_{max} psi	Model	Switching Options Switching Differential (psi)									
Code	InH2O / (psi)			00	01	10	11	04	05	08/ OG	09/ OH	H2	H3/ H6
BU	-5.0 to +5.0	14.5	D01	0.6	0.4	1.2	1.2	0.4	0.8	0.7	0.9	1.2	1.2
BY	2.5 to 16	1600 3500	D02 D03	2.0	2.0	2.0	4.0	1.2	2.4	3.1	4.3	6.0	6.0
CS	10 to 64	1600 3500	D02 D03	4.0	4.0	6.4	4.8	2.4	2.8	6.2	8.2	8.8	8.4
CK	(1.5 to 8.5)	1600 3500	D02 D03	0.3	0.1	0.3	0.3	0.1	0.1	0.29	0.39	0.5	0.5
DP	(6 to 40)	1600 3500	D02 D03	0.7	0.2	1.7	3.0	1.0	1.5	4.3	5.8	5.8	4.0
DT	(10 to 60)	1600 3500	D02 D03	3.0	1.5	3.0	4.0	1.3	2.0	5.2	7.0	7.0	7.0
EH	(25 to 160)	1600 3500	D02 D03	4.4	2.6	6.1	7.8	2.6	3.6	10.4	14.0	14.0	17.4

Sentry Series
Models: D01, D02 & D03

Approvals

EUROPEAN DIRECTIVES



Low voltage Directive (LVD) 2014/35/EU.

Compliant to LVD

Pressure Equipment Directive (PED) 2014/68/EU:

This product has a process connection size \leq DN25 and is therefore categorised as Sound Engineering Practice (SEP) under Cat 4.3

ATEX Directive 2014/34/EU



INTRINSICALLY SAFE

Certificate No. Baseefa11ATEX0203

EN 60079-0, EN 60079-11

For Zone 0 and 20 models (**Enclosure code 4 or 5, see Table 1**)



II 1GD Ex ia IIC T5 / T6 Ga ($-60^{\circ}\text{C} \leq \text{Ta} \leq +80^{\circ}\text{C}$) / ($-25^{\circ}\text{C} \leq \text{Ta} \leq +60^{\circ}\text{C}$)
Ex ia IIIC T135°C Da ($-60^{\circ}\text{C} \leq \text{Ta} \leq +80^{\circ}\text{C}$)

FLAMEPROOF

Certificate No. Baseefa12ATEX0121

IEC 60079-0, EN 60079-1, EN 60079-31

For Zone 1 models (**Enclosure Code R or H, see Table 1**)



II 2GD Ex d IIC T6 (Tamb-30°C to +65°C) Gb
Ex tb IIIC T85°C (Tamb-30°C to +65°C) Db IP6X

GLOBAL CERTIFICATION



IECEX Certified

INTRINSICALLY SAFE

Certificate No. IECEX BAS 11.0104X

IEC 60079-0, IEC 60079-11

Ex ia IIC T5 / T6 Ga ($-60^{\circ}\text{C} \leq \text{Ta} \leq +80^{\circ}\text{C}$) / ($-25^{\circ}\text{C} \leq \text{Ta} \leq +60^{\circ}\text{C}$)

Ex ia IIIC T135°C Da ($-60^{\circ}\text{C} \leq \text{Ta} \leq +80^{\circ}\text{C}$)

FLAMEPROOF:

Certificate No. IECEX BAS 12.0081

IEC 60079-0, IEC 60079-1, IEC 60079-31

Ex d IIC T6 (Tamb-30°C to +65°C) Gb

Ex tb IIIC T85°C (Tamb-30°C to +65°C) Db IP6X





Functional Safety Certified


Meets the requirements of IEC 61508-2 for use in SIL 2 safety related systems

Certificate No. Sira FSP 12016/05


Dimensions

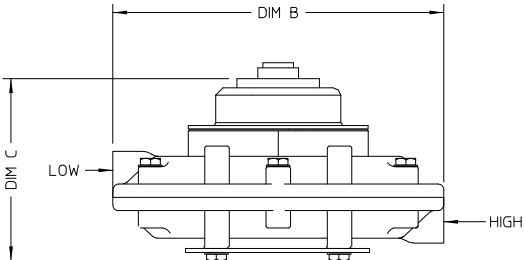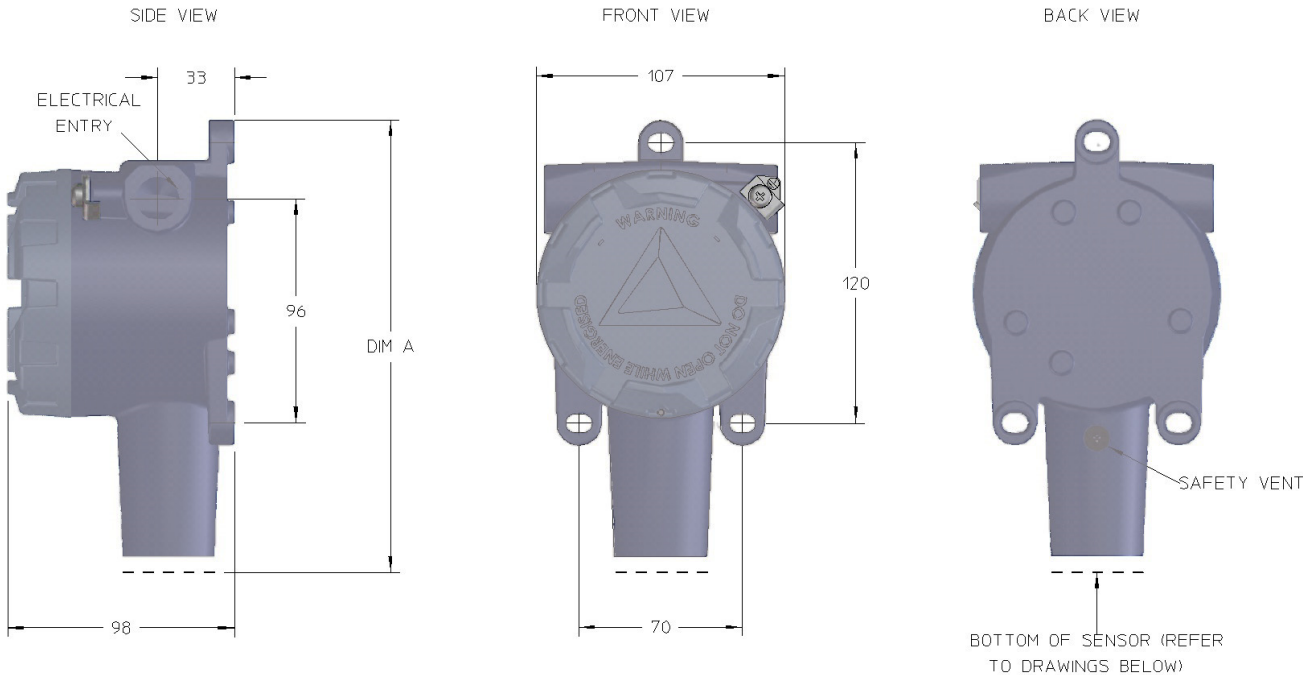

D01 SENSOR
(RANGE BC)
Pmax = 1 Bar



D02 SENSOR
(RANGES BD - EA)
Pmax = 110 Bar

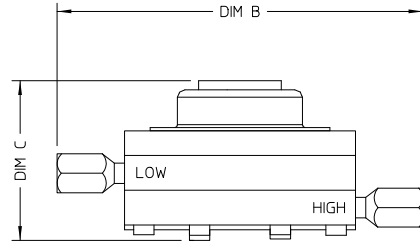

D03 SENSOR
(RANGE BD - EA)
Pmax = 250 Bar

Model	Range	DIM A	DIM B	DIM C
D01	BC	258	162	89
D02	BD - CE	246	114	77
	DC - EA	246	88	77
D03	0D - 0E	271	192	102
	DC - EA	271	166	102

Sentry Series
Models: D01, D02 & D03

In the interest of development and improvement Delta Mobrey Ltd. reserves the right to amend, without notice, details contained in this publication. No legal liability will be accepted by Delta Mobrey Ltd for any errors, omissions or amendments.

Delta Mobrey Limited
Riverside Business Park, Dogflud Way, Farnham, Surrey GU9 7SS, UK.
T+44 (0)1252 729140 F+44 (0)1252 729168 E sales@delta-mobrey.com W www.delta-mobrey.com



ISO9001
FM00720